


Datový list (2017-03-22)

Contra-Flex 2 - 80

Contra-Flex 2 - 80, expansion vessels are suitable for use in central heating and cooling installations.

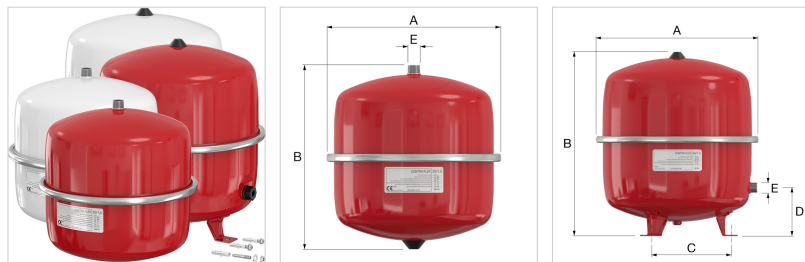

Type	Inhoud [L]	Přednas- tavený tlak [bary]	Max. working pressure [bar]	Rozměry				Syst.přip. (E)	Gewicht [kg]		Objednací číslo
				A [mm]	B [mm]	Ø C [mm]	D [mm]				
Contra-Flex 2	2	0,5	3,0	194	152			G 3/4" M	1,1	120	13211
Contra-Flex 2	2	1,5	3,0	194	152			G 3/4" M	1,1	120	13213
Contra-Flex 4	4	0,5	3,0	194	257			G 3/4" M	1,6	90	13411
Contra-Flex 4	4	1,5	3,0	194	257			G 3/4" M	1,6	90	13413
Contra-Flex 8	8	1,5	3,0	245	304			R 3/4"	2,2	50	26073
Contra-Flex 12	12	1,5	3,0	286	336			R 3/4"	2,1	36	26133
Contra-Flex 18	18	0,5	3,0	328	328			R 3/4"	3,7	24	26171
Contra-Flex 18	18	1,0	3,0	328	328			R 3/4"	3,7	24	26172
Contra-Flex 25	25	0,5	3,0	358	380			R 3/4"	4,5	18	26241
Contra-Flex 25	25	1,5	3,0	358	380			R 3/4"	4,5	18	26243
Contra-Flex 35	35	1,5	3,0	396	450	263	117	R 3/4"	5,6	18	26343
Contra-Flex 50	50	0,5	6,0	437	507	263	132	R 3/4"	11,4	12	26491
Contra-Flex 50	50	1,5	6,0	437	507	263	132	R 3/4"	11,4	12	26493
Contra-Flex 80	80	0,5	6,0	519	551	360	142	R 1"	15,0	12	26791
Contra-Flex 80	80	1,5	6,0	519	551	360	142	R 1"	15,0	12	26793



Výhody

- Nitrogen gas filling for longer maintenance of pre-pressure.

Obecné informace

- Vessels in accordance with EN13831.
- Suitable for systems with a maximum flow temperature of 120 °C.
- Max. temperature diaphragm: 70 °C.
- In accordance with Pressure Equipment Directive 2014/68/EU.

Zjistit více informací online:

[Návody](#)

[Certifikáty](#)

[CAD výkresy](#)

Meibes s.r.o. - Zastoupení Flamco

Bohnická 28/5

18100, Praha 8

T +420 284 00 10 16

F +420 284 00 10 80

E flamco@meibes.cz

I www.flamcogroup.com